


iSCAN 3_{ed} Features Overview



iSCAN 3_{ed} Hardware Features




8" IPS LCD Touch Screen

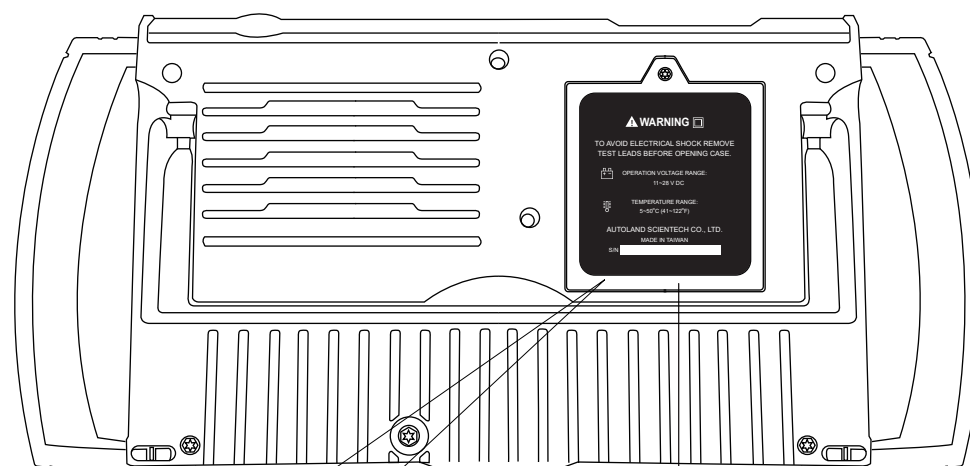

CR2032 PCB Battery
For Perpetual Calendar

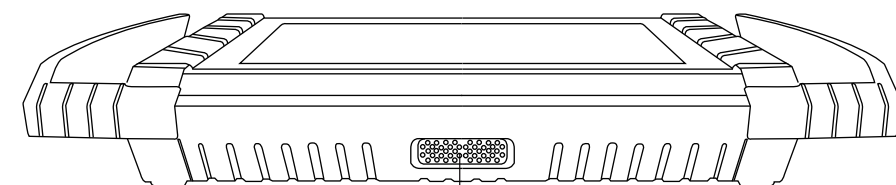

Speaker

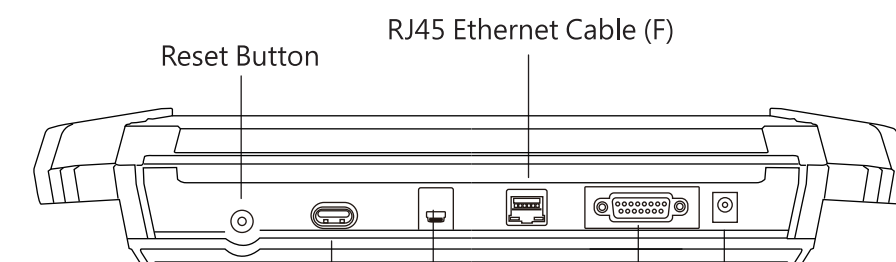

Reset Button

RJ45 Ethernet Cable (F)

USB Port (Master)

USB Port (Slave)

12 ~24V DC Input

15-PIN Diagnostic Adaptor

iSCAN 3_{ed} Basic Functions



Vehicle Diagnostic

Package includes diagnostic, setting, programming and coding functions for Asian Cars, European Cars, US Cars, Australian Car, Supercars, and Trucks.



Technical Hotline (THL)

Through remote control software, distributors or tech-support team can remotely operate iSCAN 3ed and perform necessary functions.



Setting

For basic system setting and iSCAN 3ed system information.



J2534

Supports J2534 interface standards to work with vehicle OBDII systems.



IMS2

IMS2 : patented since 2007
Interface Module Simulation System
for working with OEM software.



Support On Demand (SOD)

SOD offers capability for distributors or tech-support team to remotely utilizing licensed OEM software to perform diagnostic, programming, coding, or repair guide.



Software Update

Connect iSCAN 3ed to Internet then select [UPDATE], system will detect if new software updates are available.


★ The application software is mainly based on the actual purchase.

AUTOLAND[®]
S C I E N T E C H


iSCAN 3^{ed} Features Overview


Software Download & Update

Power the scanner by using the DC-12V adapter

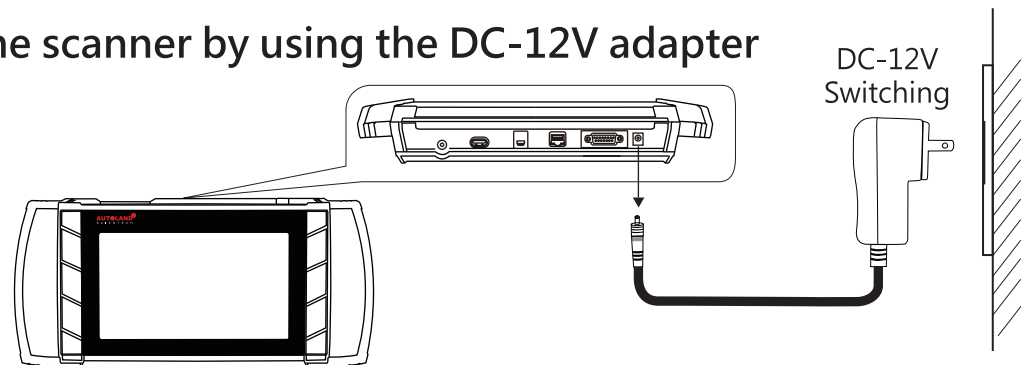


Software Update


1. Select SET UP , then select WiFi connection.
2. After Internet connection is complete, select UPDATE at main page.

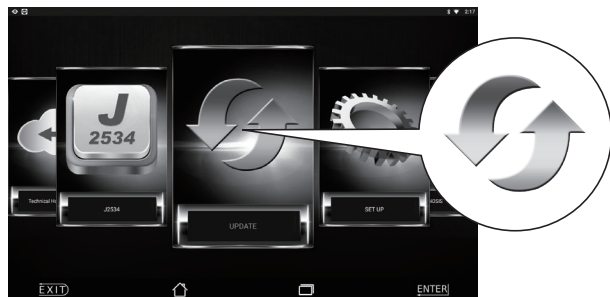


3. Entering Software Update, select [Update All] or select [Update] individually.

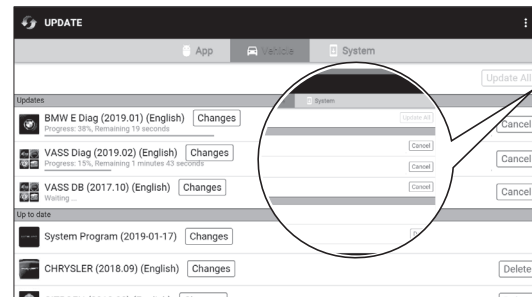

Printing Function: Using WiFi Printer

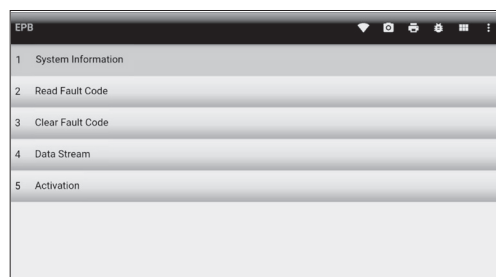

1. Setup WiFi printer network connection. Please consult owner's manual for printer.
2. Connect iSCAN 3ed to the same network as the WiFi Printer.
★ Please refer to iSCAN 3ed and printer owner's manual for detail.
3. Click printer icon  in tool bar on the top of screen.
4. Page preview on screen. Select designated printer from the top left selection area to perform printing.


Quick Operational Guide

Step 1 Locate Vehicle Diagnostic Connector

For most vehicles, OBDII connector is located by the driver's seat under the dashboard. Some models may have a lid covering the connector.


Attention:

1. Vehicles manufactured before year of 2000 may be equipped with different connector, or require different connector for different systems. Ex. Toyota before year of 2000 installed the non-OBDII connector under engine hood.
2. Please use correct diagnostic adaptor to connect with vehicle, otherwise connection may fail.

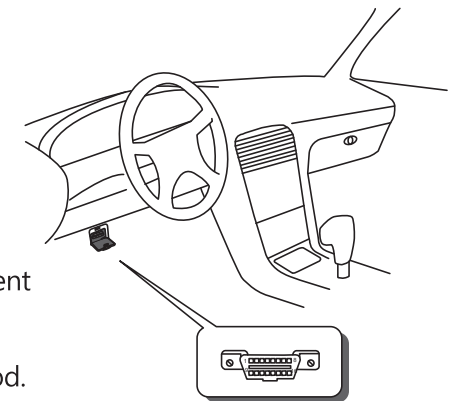

Step 2 Select Diagnostic Adaptor and Connection

1. Connect iSCAN 3ed to vehicle connector via AC-EC5 and corresponding adaptor.
2. After iSCAN 3ed powered on and ready, select [Diagnosis], then select vehicle make.

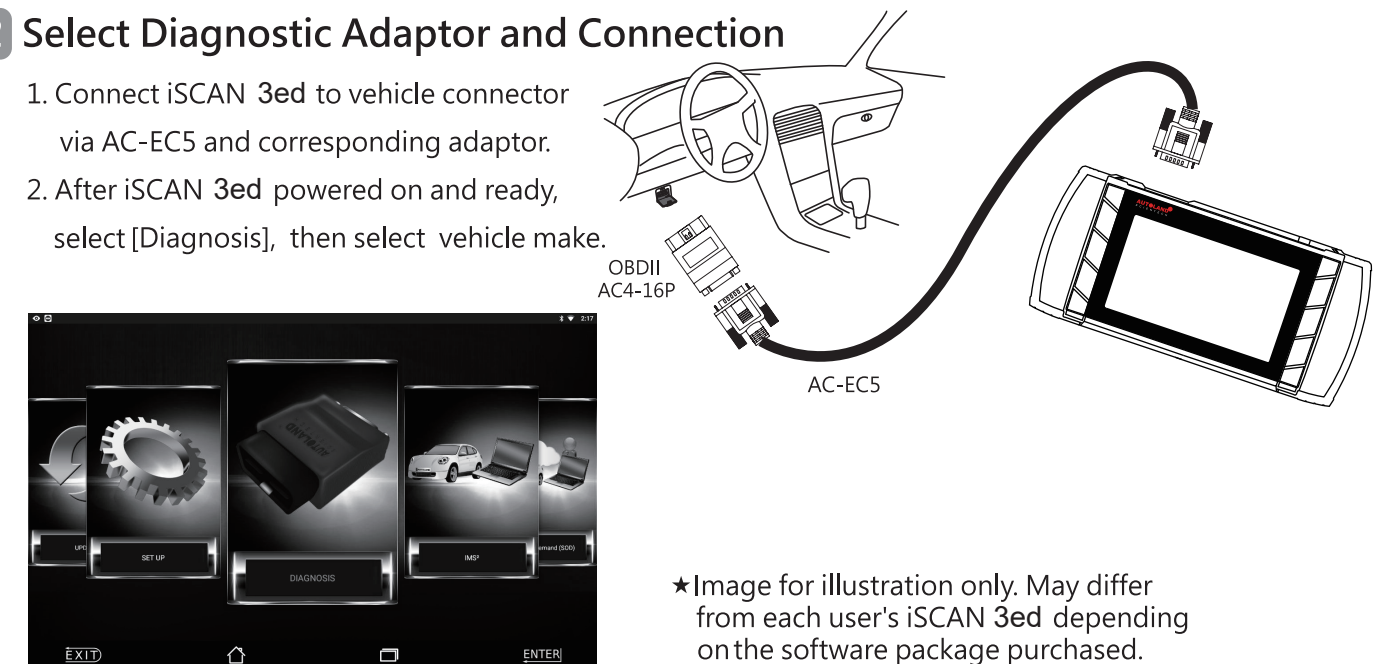

★Image for illustration only. May differ from each user's iSCAN 3ed depending on the software package purchased.

Fault Code Repair Guide

1. Click on the fault code, iSCAN 3ed will link the user to repair guide database. (Internet connection is required.)
2. Select [A Company] to review fault code related repair guide.
3. Repair guide.